

Cetop 3 Manifold Block


Features:

- Cast Iron Construction – Phosphated
- 300 Bar maximum working pressure
- 40 L/Min maximum Flow Rate
- P and T Ports – 1/2" BSP; A and B Ports – 3/8" BSP



Benefits:

- Reduced fitting and installation costs
- Compact design of valve circuits
- Reduces leak paths
- Allows for easy modification to valve assembly stacks

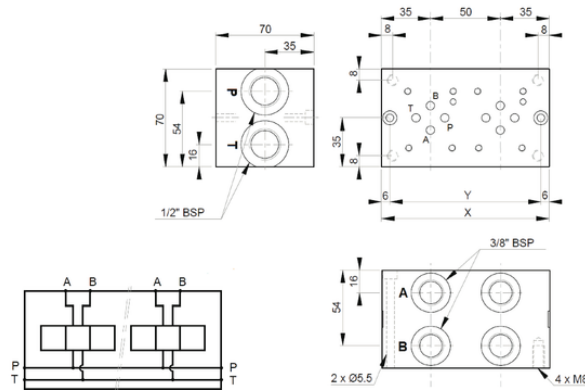

Item No	Part No	No. of Stations	X mm	Y mm	Weight
5016380PFP	MR3-1G	1	70	58	2.1
5016382PFP	MR3-2G	2	120	108	3.6
5016385PFP	MR3-3G	3	170	158	5.2
5016387PFP	MR3-4G	4	220	208	6.7
5016388PFP	MR3-5G	5	270	258	8.3
5016390PFP	MR3-6G	6	320	308	9.8