



STR Series Suction Strainers

Filtration

- M90 – 90 Micron


Temperature

- From -13°F to +230°F
- From -25°C to +110°C

Oil flow direction from exterior to interior



Compatibility

- To ISO 2943: Valid for mineral oils (type HH-HM-HR-HV-HG to ISO 6743/4) and synthetic fluids (type HS-HFDR-HFDS-HFDU to ISO 6743/4)
- For aqueous emulsions (type HFAE-HFAS to ISO 6743/4)

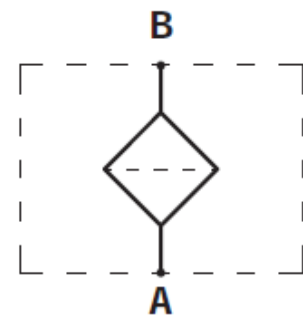

Filter body Δp pressure drop


The curves are plotted using mineral oil reference viscosity 30 mm²/s (cSt) to ISO 3968.

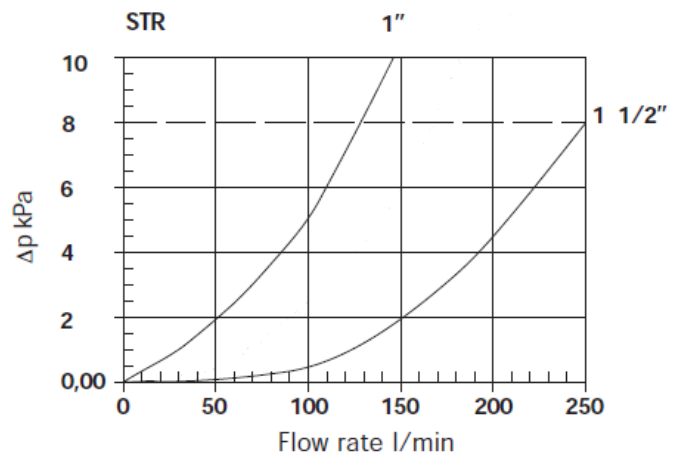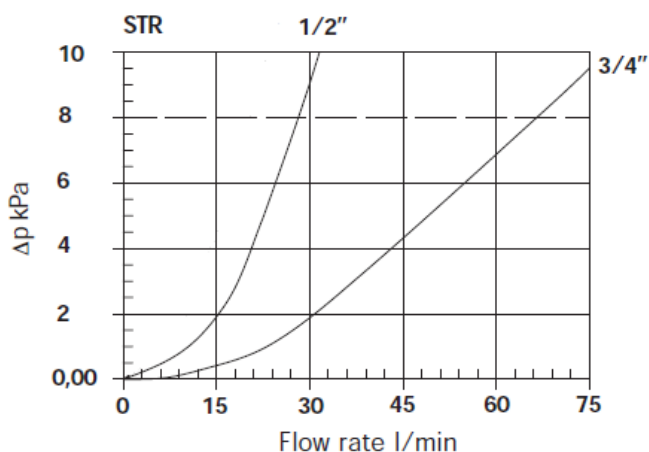



HYDRAULIC MEGASTORE

Serving the Hydraulics Industry Worldwide

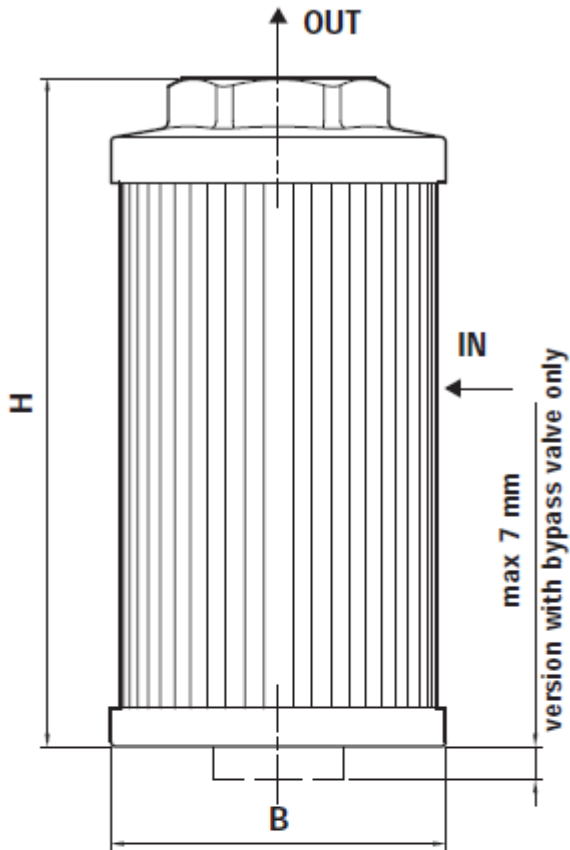

Size	A	B (mm)	H (mm)	A/F (mm)	Weight (kg)
045-2 G1	G 1/2"	46	105	30	0.19
065-2 G1	G 3/4"	65	110	41	0.22
065-4 G1	G 1"	65	144	41	0.22
086-1 G1	G 1-1/2"	86	143	69	0.33

