

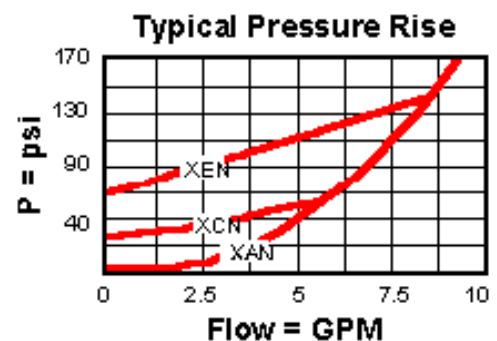


CXBA-XAN Free flow nose to side check valve

Technical Features

- Two-port check valves share the same cavity for a given frame size, however, pay close attention as flow paths may be in opposite directions.
- Check valves offer extremely low leakage rates with a maximum leakage of less than 1 drop per minute (0,07 cc/min).
- Will accept 5000 psi (350 bar) at ports 1 and 2.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

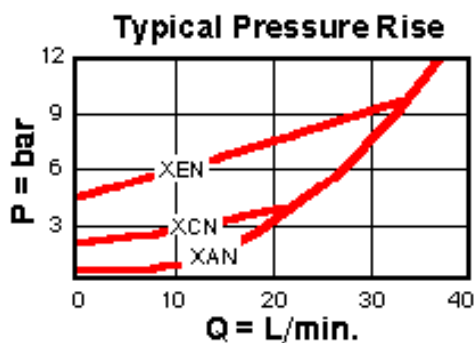

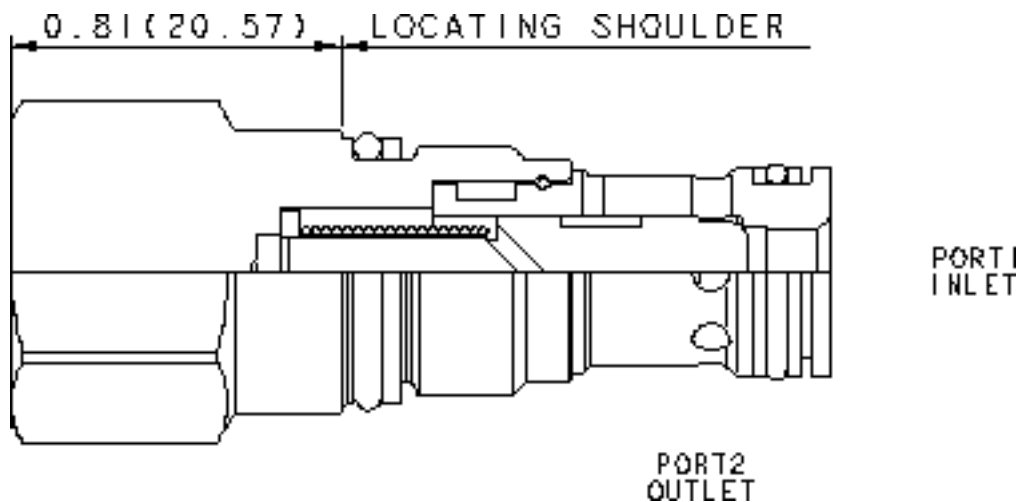

HYDRAULIC MEGASTORE

Serving the Hydraulics Industry Worldwide

	U.S. Units	Metric Units
Cavity	T-162A	
Capacity	10gpm	40 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.	0,07 cc/min.
Series (Cavity)	Series 0	
Valve Hex Size	3/4 in.	19,1 mm
Valve Installation Torque	20 – 25 lbf ft	27 – 34 Nm
Seal Kits – Cartridge	Buna: 990-162-007	
Seal Kits – Cartridge	Polyurethane: 990-162-002	
Seal Kits – Cartridge	Viton: 990-162-006	
Model Weight	0.17 lb.	0.08 kg.