

HFTX-PR

ELESA original design

Oil level indicators with prismatic window



Material

Transparent polyamide based (PA-T) technopolymer. Resistant to solvents, oils with additives, greases, acids and alkali. Avoid contact with alcohol or detergents containing alcohol.

The window consists of a continuous series of prisms which provide a clear and immediate reading of the level of the oil contained in the reservoir.

Packing ring

NBR synthetic rubber.

Maximum continuous working temperature

100°C.

Technical data


The tightening torque indicated in the table guarantees an optimal tightness, keeping the packing ring in the correct position.

Note

For use with other fluids with special additives, please contact ELESA Sales Department.

Accessories on request

Brass nut type GH. for fitting to reservoirs with wall thickness smaller than 5 mm.

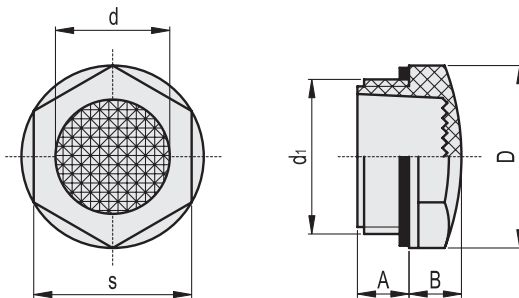

| Code | Description | d ₁ | A | B | D | d | s | Tightening torque [Nm] | ⚖️ |
|-------|----------------|----------------|------|----|------|----|----|------------------------|----|
| 13652 | HFTX.9/PR-1/4 | G 1/4 | 10 | 6 | 18 | 9 | 15 | 2÷3 | 3 |
| 13672 | HFTX.12/PR-3/8 | G 3/8 | 7.5 | 7 | 22 | 11 | 19 | 3÷5 | 4 |
| 13692 | HFTX.15/PR-1/2 | G 1/2 | 10.5 | 8 | 26 | 14 | 22 | 4÷6 | 5 |
| 13722 | HFTX.20/PR-3/4 | G 3/4 | 10.5 | 9 | 31.5 | 20 | 27 | 6÷8 | 8 |
| 13742 | HFTX.24/PR-1 | G 1 | 11 | 10 | 40 | 25 | 34 | 8÷10 | 12 |



HYDRAULIC MEGASTORE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

