

## Oil fill plugs



- **Material**  
Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.
- **Colour**  
Black, matte finish.
- **Packing ring**  
NBR synthetic rubber.
- **Standard executions**
  - **TCD.**: without side hole.
  - **TCDF.**: with side breather hole.
- **Maximum continuous working temperature**  
100°C.
- **Graphic symbol "fill"**  
According to DIN regulations.


### Technical data

The tightening torque indicated in the table guarantees an optimal tightness, keeping the packing ring in the correct position.

### Accessories on request

TCD. oil fill plugs are suitable for mounting aluminium plates with graphic symbols type MH. .



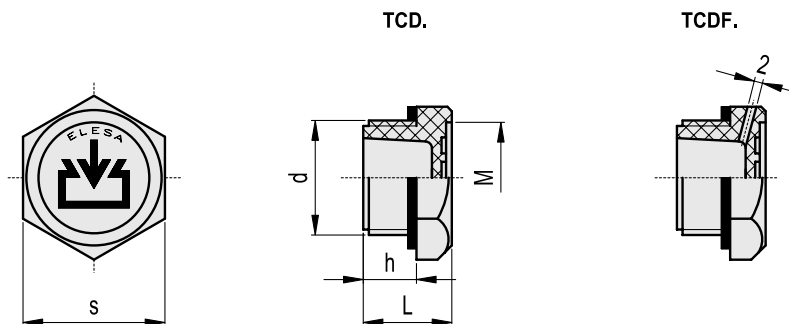

Code	Description	d	h	s	L	M	Tightening torque [Nm]	⚖
58551	TCD.10x1.5	M10x1.5	9	19	16	15	4÷5	4
58553	TCD.12x1.5	M12x1.5	9	19	16	15	6÷8	4
58555	TCD.14x1.5	M14x1.5	9	19	16	15	6÷8	5
58557	TCD.16x1.5	M16x1.5	9	22	16	17	8÷10	7
58559	TCD.18x1.5	M18x1.5	11	26	18	20.5	8÷10	8
58561	TCD.20x1.5	M20x1.5	11	26	18	20.5	8÷10	8
58563	TCD.22x1.5	M22x1.5	12	32	20	25	10÷12	12
58565	TCD.25x1.5	M25x1.5	12	32	20	25	10÷12	12
58569	TCD.26x1.5	M26x1.5	12	32	20	25	10÷12	14
58567	TCD.35x1.5	M35x1.5	13	38	22	31	15÷18	15
58571	TCD.40x1.5	M40x1.5	14	46	24	38	15÷18	20
58591	TCD.1/8	G 1/8	9	19	16	15	4÷6	4
58601	TCD.1/4	G 1/4	9	19	16	15	4÷6	4
58611	TCD.3/8	G 3/8	9	22	16	17	8÷10	5
58621	TCD.1/2	G 1/2	11	26	18	20.5	8÷10	8
58631	TCD.3/4	G 3/4	12	32	20	25	10÷12	14
58641	TCD.1	G 1	13	38	22	31	12÷15	18
58643	TCD.1¼	G1 1/4	14	46	24	38	15÷18	20
58645	TCD.1½	G1 1/2	15	55	26	46	15÷18	24

#### TCDF.

Code	Description	d	h	s	L	M	Tightening torque [Nm]	⚖
58651	TCDF.10x1.5	M10x1.5	9	19	16	15	4÷5	4
58653	TCDF.12x1.5	M12x1.5	9	19	16	15	6÷8	4
58655	TCDF.14x1.5	M14x1.5	9	19	16	15	6÷8	5
58657	TCDF.16x1.5	M16x1.5	9	22	16	17	8÷10	7
58659	TCDF.18x1.5	M18x1.5	11	26	18	20.5	8÷10	8
58661	TCDF.20x1.5	M20x1.5	11	26	18	20.5	8÷10	8
58663	TCDF.22x1.5	M22x1.5	12	32	20	25	10÷12	12
58665	TCDF.25x1.5	M25x1.5	12	32	20	25	10÷12	12
58681	TCDF.26x1.5	M26x1.5	12	32	20	25	10÷12	14
58667	TCDF.35x1.5	M35x1.5	13	38	22	31	15÷18	15
58683	TCDF.40x1.5	M40x1.5	14	46	24	38	15÷18	20
58669	TCDF.1/8	G 1/8	9	19	16	15	4÷6	4
58671	TCDF.1/4	G 1/4	9	19	16	15	4÷6	4
58673	TCDF.3/8	G 3/8	9	22	16	17	8÷10	5
58675	TCDF.1/2	G 1/2	11	26	18	20.5	8÷10	8
58677	TCDF.3/4	G 3/4	12	32	20	25	10÷12	14
58679	TCDF.1	G 1	13	38	22	31	12÷15	18
58685	TCDF.1¼	G1 1/4	14	46	24	38	15÷18	20
58687	TCDF.1½	G1 1/2	15	55	26	46	15÷18	24