


Straight Female Stud Fitting Type FI-GA-...-R ▪ Series L / S

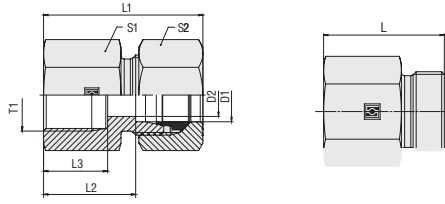

Female Whitworth Parallel Pipe Thread (BSPP)

Ordering Codes		
FI-GA-10*L*R*-W3*-MS		
* Straight Female Stud Fitting		FI-GA
* Outside Tube Diameter D1 (in mm)		-10
* Series	Light Series	L
	Heavy Series	S
* Thread Type	Female Whitworth Parallel Pipe Thread (BSPP)	R
If required, please indicate special sizes, e.g. R3/8!		
* Material Code	Steel, zinc/nickel-plated	-W3
Please contact STAUFF for alternative materials and surface finishings.		
* Assembling / Kitting	Fitting body only	—
	Fitting body supplied with cutting ring and union nut	-MS
	Fitting body supplied with soft-sealing cutting ring and union nut	-MSV

Series	Tube OD		PN	Dimensions								Weight (^{kg} /lbs) ca. per 100 ²	Ordering Codes ³
	(mm/in)	D1		(bar/psi)	(mm/in)	Thread T	D2	L	L1 ¹	L2	L3		
L	6	315		G 1/8	4	26	34	19	12	14	14	3,26	FI-GA-06LR-W3
	.24	4568			.16	1.02	1.34	.75	.47	.55	.55	7.16	
	6	315		G 1/4	4	31	39	24	18	19	14	3,78	FI-GA-06LR1/4-W3
	.24	4568			.16	1.22	1.54	.94	.71	.75	.55	8.32	
	8	315		G 1/4	6	31	39	24	17	19	17	3,91	FI-GA-08LR-W3
	.31	4568			.24	1.22	1.54	.94	.67	.75	.67	8.61	
	8	315		G 3/8	6	31	39	24	16	24	17	2,28	FI-GA-08LR3/8-W3
	.31	4568			.24	1.22	1.54	.94	.63	.94	.67	5.02	
	8	315		G 1/2	6	36	44	29	20	27	17	8,35	FI-GA-08LR1/2-W3
	.31	4568			.24	1.42	1.73	1.14	.79	1.06	.67	18.37	
	10	315		G 1/4	8	32	40	25	17	19	19	3,95	FI-GA-10LR-W3
	.39	4568			.31	1.26	1.57	.98	.67	.75	.75	8.69	
	10	315		G 3/8	8	32	40	25	16	24	19	4,94	FI-GA-10LR3/8-W3
	.39	4568			.31	1.26	1.57	.98	.63	.94	.75	10.86	
	10	315		G 1/2	8	37	45	30	20	27	19	8,36	FI-GA-10LR1/2-W3
	.39	4568			.31	1.46	1.77	1.18	.79	1.06	.75	18.39	
	12	315		G 1/4	8	33	41	26	17	19	22	4,44	FI-GA-12LR1/4-W3
	.47	4568			.31	1.3	1.61	1.02	.67	.75	.87	9.76	
	12	315		G 3/8	10	33	41	26	17	24	22	6,43	FI-GA-12LR-W3
	.47	4568			.39	1.3	1.61	1.02	.67	.94	.87	14.14	
	12	315		G 1/2	10	37	45	30	20	27	22	8,38	FI-GA-12LR1/2-W3
	.47	4568			.39	1.46	1.77	1.18	.79	1.06	.87	18.44	
	15	315		G 1/2	12	38	46	31	20	27	27	8,84	FI-GA-15LR-W3
	.59	4568			.47	1.50	1.81	1.22	.79	1.06	1.06	19.46	
	18	315		G 3/8	15	34	43	26,5	20	27	32	9,61	FI-GA-18LR3/8-W3
	.71	4568			.59	1.34	1.69	1.04	.79	1.06	1.26	21.15	
	18	315		G 1/2	15	38	47	30,5	20	27	32	9,15	FI-GA-18LR-W3
	.71	4568			.59	1.50	1.85	1.20	.79	1.06	1.26	20.14	
	22	160		G 3/4	19	43	52	35,5	22	36	36	17,87	FI-GA-22LR-W3
	.87	2320			.75	1.69	2.05	1.40	.87	1.42	1.42	39.31	
	28	160		G 1	24	45,5	54,5	38	24,5	41	41	21,80	FI-GA-28LR-W3
	1.1	2320			.94	1.79	2.15	1.50	.96	1.61	1.61	47.96	
	35	160		G 1 1/4	30	51,5	62,5	41	26,5	55	50	47,49	FI-GA-35LR-W3
	1.38	2320			1.18	2.03	2.46	1.61	1.04	2.17	1.97	104.47	
	42	160		G 1 1/2	36	53,5	65,5	42,5	28,5	60	60	53,90	FI-GA-42LR-W3
	1.65	2320			1.42	2.11	2.58	1.67	1.12	2.36	2.36	118.58	
S	6	630		G 1/4	4	33	41	26	17	19	17	4,33	FI-GA-06SR-W3
	.24	9135			.16	1.3	1.61	1.02	.67	.75	.67	9.52	
	8	630		G 1/4	5	33	41	26	17	19	19	4,53	FI-GA-08SR-W3
	.31	9135			.2	1.30	1.61	1.02	.67	.75	.75	9.96	
	10	630		G 3/8	7	34	43	26,5	17	24	22	6,99	FI-GA-10SR-W3
	.39	9135			.28	1.34	1.69	1.04	.67	.94	.87	15.37	
	12	630		G 3/8	8	34	43	26,5	17	24	24	7,08	FI-GA-12SR-W3
	.47	9135			.31	1.34	1.69	1.04	.67	.94	.94	15.57	
	12	630		G 1/2	8	38	47	30,5	20	27	24	9,23	FI-GA-12SR1/2-W3
	.47	9135			.31	1.50	1.85	1.20	.79	1.06	.94	20.31	
	14	630		G 1/2	10	40	50	32	20	27	27	9,64	FI-GA-14SR-W3
	.55	9135			.39	1.57	1.97	1.26	.79	1.06	1.06	21.20	
	16	630		G 1/2	12	40	50	31,5	20	27	30	9,70	FI-GA-16SR-W3
	.63	9135			.47	1.57	1.97	1.24	.79	1.06	1.18	21.33	
	20	400		G 3/4	16	45	56	34,5	22	36	36	19,50	FI-GA-20SR-W3
	.79	5800			.63	1.77	2.20	1.36	.87	1.42	1.42	42.90	
	25	400		G 1	20	49,5	61,5	37,5	24,5	41	46	25,14	FI-GA-25SR-W3
	.98	5800			.79	1.95	2.42	1.48	.96	1.61	1.81	55.30	
	30	400		G 1 1/4	25	55,5	68,5	42	26,5	55	50	51,30	FI-GA-30SR-W3
	1.18	5800			.98	2.19	2.70	1.65	1.04	2.17	1.97	112.86	
	38	315		G 1 1/2	32	59,5	74,5	43,5	28,5	60	60	62,80	FI-GA-38SR-W3
1.50	4568			1.26	2.34	2.93	1.71	1.12	2.36	2.36	138.16		

¹ Approximate dimension in assembled condition.

² Weight excluding cutting ring and union nut.

³ Standard scope of delivery: Fitting body only.