




Filters  $\label{eq:metallic} \text{Metallic suction filter 149 } \mu$ 

Page: 1/1



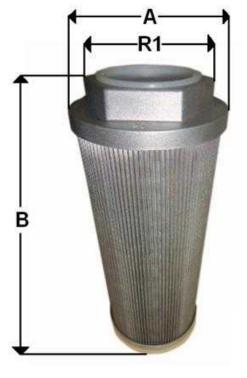

**Materials:** -steel cap/ support tube -aluminium die cast nut

Max. temperature: 80°C

| Part nº    | R1        | Max. flow (I/min) | A   | В   |
|------------|-----------|-------------------|-----|-----|
|            |           |                   |     |     |
| FITS10T149 | 3/8"BSP   | 12                | 46  | 90  |
| FITS11T149 | 1/2"BSP   | 20                | 46  | 105 |
| FITS20T149 | 3/4''BSP  | 28                | 64  | 109 |
| FITS21T149 | 1"BSP     | 40                | 64  | 139 |
| FITS31T149 | 1"1/4 BSP | 60                | 86  | 139 |
| FITS32T149 | 1"1/2BSP  | 80                | 86  | 168 |
| FITS33T149 | 1"1/2BSP  | 120               | 86  | 200 |
| FITS34T149 | 2"BSP     | 160               | 100 | 235 |
| FITS35T149 | 2" BSP    | 200               | 100 | 260 |
| FITS42T149 | 2''1/2BSP | 300               | 150 | 211 |
| FITS43T149 | 3" BSP    | 600               | 150 | 272 |

Printed on: 21/11/2020 at 10:19