


UNIJOIN UG 20: TECHNICAL DATA

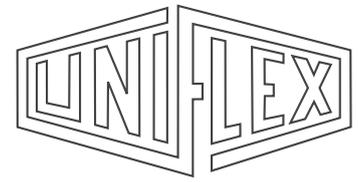

UG 20 Ecoline

UG 20 Mobileline


Technical data	UG 20 Ecoline	UG 20 Mobileline
Crimp force (kN / Ton)	190	190
Greased machine	✓	✓
Control	Control A	Control A
SAE R 12 / 4SP* 1 piece fitting	1 ¼"	1 ¼"
SAE R 15 / 4SH* 2 piece fitting	1 ¼"	1 ¼"
SAE R 12 / 4SP* 2 piece fitting	1 ½"	1 ½"
Industrial	2"	2"
90° Elbows	1 ¼"	1 ¼"
Max. Crimp range	70 mm	70 mm
Opening	+ 27 mm	+ 27 mm
Opening without dies	97 mm	97 mm
Master dies length (mm)	100 mm	100 mm
Type of dies	239-xx-Ø	239-xx-Ø
Speed (mm/sec)		
Close	2,0	1,5
Crimp	2,0	0,4
Open	7,6	5,7
Noise level	69 dBA	69 dBA
Drive	3 kW	1,8 kW
Oil	35 L	4 L
L x W x H (mm)	600 x 550 x 630	430 x 370 x 440
Weight	150 kg	110 kg
Options		
12 VDC / 24 VDC	-	✓
1 Phase	✓	✓
3 Phase	✓	-

* According to the fitting.

Type of dies	
	239-xx-Ø-yy
Ø mm	-mm-
6,8	50
9	50
10	50
12	65
14	65
16	65
17	65
19	65
20	65
22	65
24	65
26	65
28	80
30	80
31	80
32	80
36	80
38	80
39	80
40	80
44	80
47	100
50	100
54	100
57	100
62	100

We reserve the right to make technical changes without notice. Options are machine parts that can only be ordered while buying the machine.

Package



QDS 239 B



QDC 239.5

- Package = Machine
- + PB Ø 17, 20, 24, 28, 32, 40, 44, 50
- + QDC 239.5
- + QDS 239 B