


SUITABILITY	FEATURES / BENEFITS
<ul style="list-style-type: none"> Compressed air Water Chemicals Fuel / Oil 	<ul style="list-style-type: none"> Produced to exacting tolerances Silicone free Seamless construction with a mirror smooth inner layer for improved flow Resistant to a wide range of chemicals Excellent abrasion resistance Low moisture absorption Lightweight and flexible for easy installation
SPECIFICATIONS	
Temperature range	-40°C to + 80°C
Pressure rating	Values given are based on the short term burst pressure of PNFM and PINF hose at 20°C using a 4:1 safety factor. NOTE: Any increase in temperature above 20°C will result in a decline in the working pressure values.
Construction	Virgin polymer nylon (PA) 11 or 12
Applicable standards	BS 5409 Part 1:1976



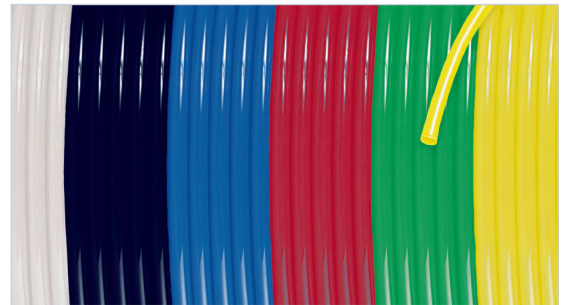


Supplied in full coils only

+ DIN 73378 flexible nylon hose available in sizes marked

FLEXIBLE NYLON TUBE – METRIC
PNFM – NATURAL
30 METRE COILS


1355




PART NUMBER			
+ PNFM4/25	4.0	2.5	26
+ PNFM5/3	5.0	3.0	24
+ PNFM6/4	6.0	4.0	24
+ PNFM8/55	8.0	5.5	22
+ PNFM8/6	8.0	6.0	17
PNFM10/7	10.0	7.0	22
+ PNFM10/8	10.0	8.0	17
+ PNFM12/9	12.0	9.0	21
PNFM12/10	12.0	10.0	14
PNFM14/11	14.0	11.0	18
PNFM16/12	16.0	12.0	18

100 METRE COILS

+ PNFM6/4-1	6.0	4.0	24
+ PNFM8/6-1	8.0	6.0	17
PNFM10/7-1	10.0	7.0	22




PNFM – YELLOW
30 METRE COILS


1355

PART NUMBER			
+ PNFM4/25Y	4.0	2.5	26
+ PNFM6/4Y	6.0	4.0	24
+ PNFM8/55Y	8.0	5.5	22
+ PNFM8/6Y	8.0	6.0	17
PNFM10/7Y	10.0	7.0	22
+ PNFM10/8Y	10.0	8.0	17




PNFM – RED
30 METRE COILS


1355

PART NUMBER			
+ PNFM4/25R	4.0	2.5	26
+ PNFM5/3R	5.0	3.0	24
+ PNFM6/4R	6.0	4.0	24
+ PNFM8/55R	8.0	5.5	22
+ PNFM8/6R	8.0	6.0	17
PNFM10/7R	10.0	7.0	22

PNFM – BLUE
30 METRE COILS


1355




PART NUMBER			
+ PNFM4/25BL	4.0	2.5	26
+ PNFM5/3BL	5.0	3.0	24
+ PNFM6/4BL	6.0	4.0	24
+ PNFM8/55BL	8.0	5.5	22
+ PNFM8/6BL	8.0	6.0	17
PNFM10/7BL	10.0	7.0	22
+ PNFM10/8BL	10.0	8.0	17
+ PNFM12/9BL	12.0	9.0	21
PNFM12/10BL	12.0	10.0	14

100 METRE COILS

+ PNFM4/25BL1	4.0	2.5	26
---------------	-----	-----	----

PNFM – BLACK
30 METRE COILS


1355




PART NUMBER			
+ PNFM4/25BK	4.0	2.5	26
+ PNFM5/3BK	5.0	3.0	24
+ PNFM6/4BK	6.0	4.0	24
+ PNFM8/55BK	8.0	5.5	22
+ PNFM8/6BK	8.0	6.0	17
PNFM10/7BK	10.0	7.0	22
+ PNFM10/8BK	10.0	8.0	17
+ PNFM12/9BK	12.0	9.0	21
PNFM12/10BK	12.0	10.0	14

100 METRE COILS

+ PNFM6/4BK-1	6.0	4.0	24
---------------	-----	-----	----

PNFM – GREEN
30 METRE COILS


1355

PART NUMBER			
+ PNFM4/25G	4.0	2.5	26
+ PNFM5/3G	5.0	3.0	24
+ PNFM6/4G	6.0	4.0	24
+ PNFM8/55G	8.0	5.5	22
+ PNFM8/6G	8.0	6.0	17
PNFM10/7G	10.0	7.0	22