
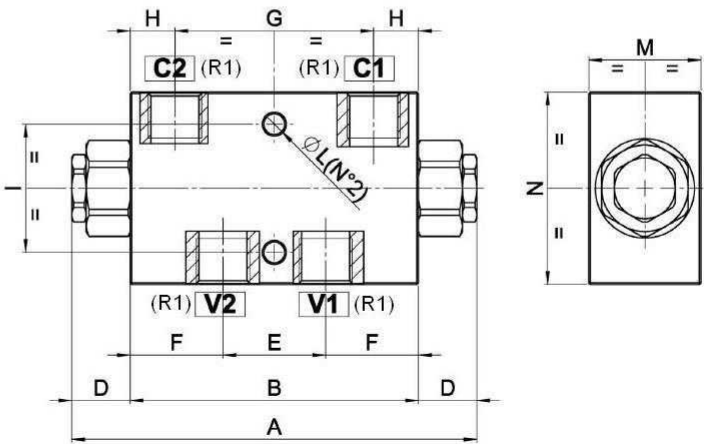



Hydraulic valves
Check valves

Double pilot operated check valve

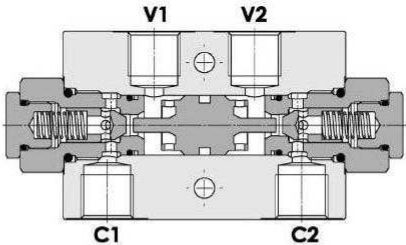

Material Body in Aluminium
Cracking Pressure 2,5 bar (5 bar and 10 bar on request)

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	ØN	A	B	D	E	F	G	H	I	M	N
VT003006	3/8" BSP	30	250	1 : 7	6,5	127	90	18,5	32	29	62	14	40	35	60
VT003008	1/2" BSP	45	250	1 : 3.5	8,5	138	110	14,5	34	38	68	21	40	35	70