

Pilot operated double check valves in block (in T)




1/1







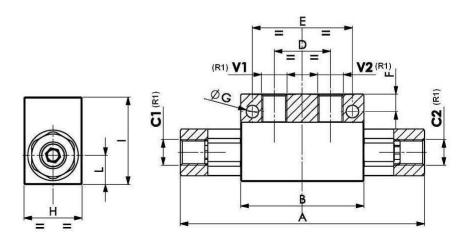

Material Body in Steel Cracking Pressure 2 bar

| Part nº | R1 | Max. flow (I/min) | Max. Press. (bar) | Pilot ratio | ØG | A | В | D | E | F | Н | I | L |
|--------------|----------|-------------------------|-------------------------|----------------|-----|-----|------|----|------|----|----|----|----|
| FPD 1/4 | 1/4" BSP | 12 | 350 | 1:4 | 6,5 | 126 | 63,6 | 29 | 51,6 | 9 | 30 | 45 | 15 |
| FPD 3/8-20 L | 3/8" BSP | 20 | 300 | 1:4 | * | 126 | 63,6 | 29 | * | * | 30 | 45 | 15 |
| FPD 3/8 | 3/8" BSP | 30 | 300 | 1:6 | 8 | 158 | 90 | 40 | 75 | 17 | 40 | 60 | 20 |
| FPD 1/2 | 1/2" BSP | 45 | 300 | 1:4 | 8 | 174 | 90 | 40 | 75 | 17 | 40 | 60 | 20 |
| FPD 3/4 | 3/4" BSP | 85 | 280 | 1:3.6 | 9 | 212 | 120 | 60 | 104 | 16 | 50 | 70 | 25 |

^{*} Valve FPD 3/8-20L is supplied without fixing holes

Printed on: 27/01/2024 at 09:51