

Hydraulic hoses TrAle GOLD

Steel Braid TrAle GOLD - RockCover

EN 856 4SP hose TrAle Gold - RockCover



Composition:

- Inner tube: special synthetic rubber resistant to mineral, vegetable and hydraulic oil.
- Reinforcement: four braids of steel wire.
- Cover: synthetic rubber, high resistant to oil, abrasion and weather.


Working temperature: From -40° C to +100° C.

FLAME RETARDANT according to ISO 8330: 2014

Part n°	DN	Ø in	Ø out	Working Pressure (bar)	Working pressure (psi)	Burst pressure (bar)	Burst pressure (psi)	Bending radius (mm)	Weight (kg/m)
ML429006RC	3/8"	9.9	21,1	445	6.455	1.780	25.810	180	0.70
ML429008RC	1/2"	13	24,2	425	6.465	1.700	24.070	230	0.85
ML429010RC	5/8"	16.4	27,9	350	5.075	1.400	20.300	250	1.11
ML429012RC	3/4"	19.5	32	350	5.075	1.400	20.300	300	1.41
ML429016RC	1"	26	38,9	280	4.640	1.120	18.500	340	1.86

ISO 6945

ABRASION RESISTANCE

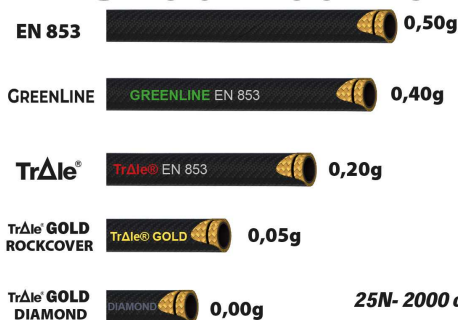

ISO 7326

OZONE RESISTANCE

