


Flow check and metering excavator valve, 3/4, right

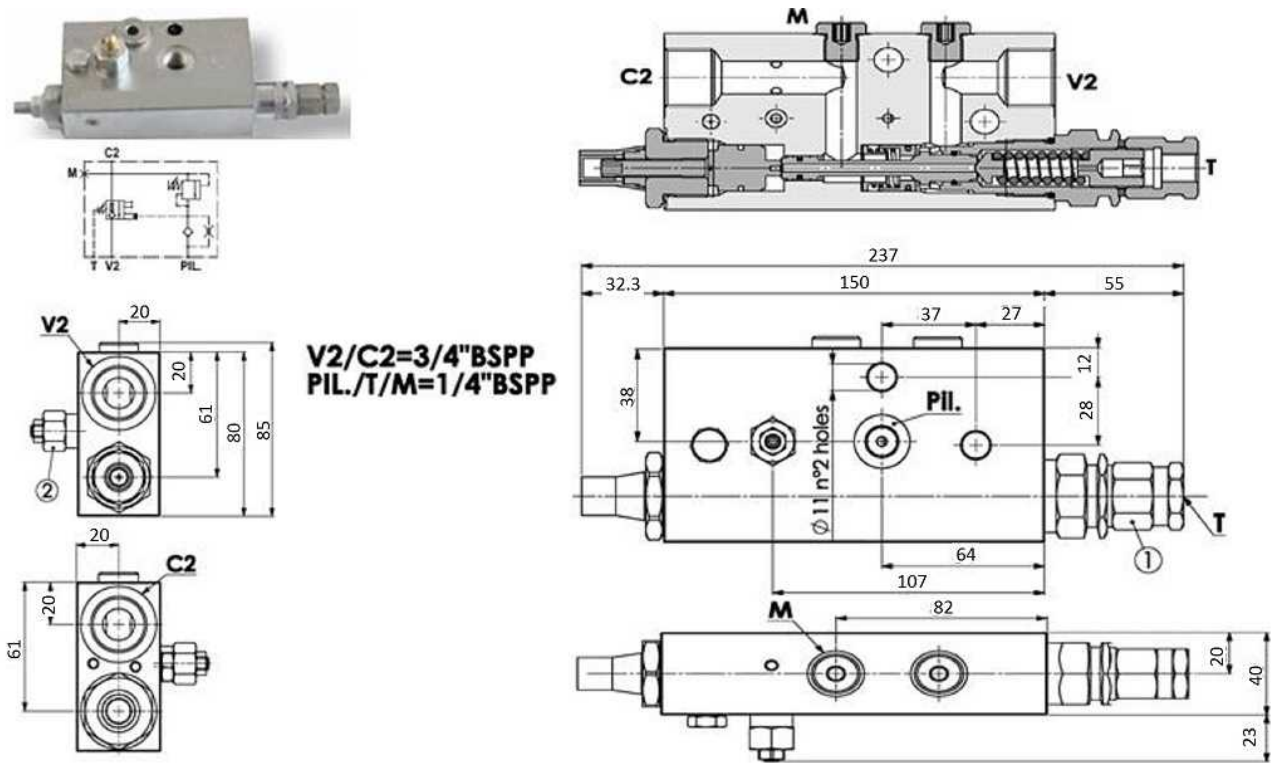

Spring valve 1 Adjustable pressure range (bar): 3,5-19,5
Pressure increase (bar/turn): 3,5
Standard setting (bar): 7,5

Spring valve 2 Adjustable pressure range (bar): 250-500
Pressure increase (bar/turn): 198
Standard setting (bar): 350

Materials: Body is in steel zinc plated. Internal parts are in hardened steel.

Adjustment means: leakproof screw adjustment

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Version
VSEXC150S3/4LDX0550	3/4" BSP	150	420	Derecha

R1=V2, C2