


Quick couplings AISI 316

Quick couplings TrAle

Flat face quick coupling ISO16028 TrAle

Stainless Steel AISI 316-L

Page: 1/1

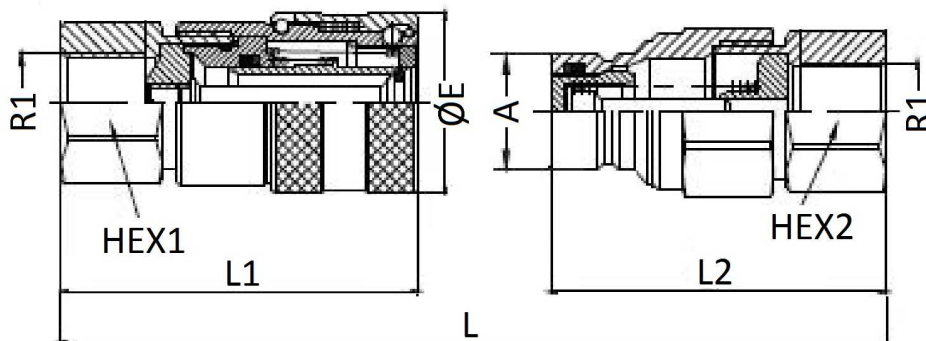

Seals: FKM

Working temperature: -20°C / +100°C

Spillage (ml): ISO6: 0.006; ISO 10: 0.012; ISO 12: 0.02

Spillage (ml); ISO16:0.032; ISO 19: 0.035

Part n°	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
ZB900104	1/4" BSP	300	6	1	M	12	96.2	0	49,2		20	0	16.1
ZB900106	3/8" BSP	250	10	2	M	23	108.4	0	55,8		24	0	19.7
ZB900108	1/2" BSP	250	12	3	M	45	129.3	0	72		32	0	24.5
ZB900112	3/4" BSP	250	16	4A	M	75	138	0	75,5		36	0	27
ZB900116	1" BSP	250	19	4	M	100	172.1	0	93,8		41	0	30
ZB900204	1/4" BSP	300	6	1	H	12	96.2	58,2	0	20	0	28	
ZB900206	3/8" BSP	250	10	2	H	23	108.4	68,2	0	24	0	32	
ZB900208	1/2" BSP	250	12	3	H	45	129.3	75	0	32	0	38	
ZB900212	3/4" BSP	250	16	4A	H	75	138	80	0	36	0	42	
ZB900216	1" BSP	250	19	4	H	100	172.1	99,8	0	41	0	48	