


Retaining system to DIN 2353 OPEN

Mild Steel

1/1

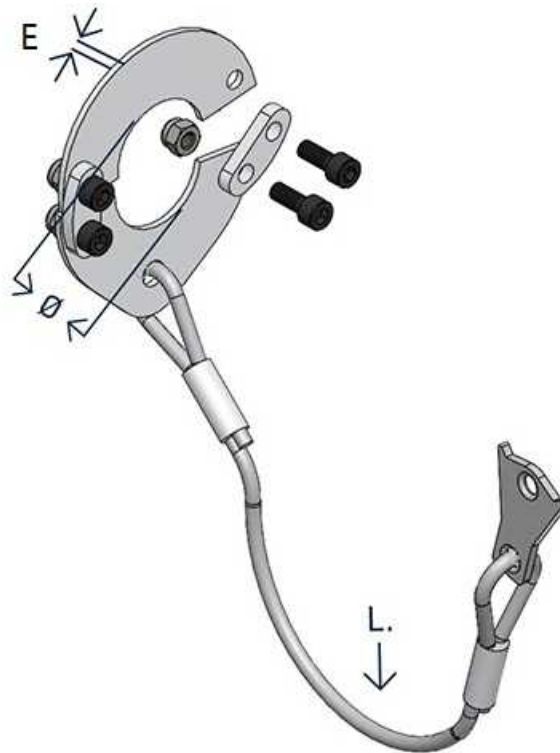

Part n°	Ø in	Details	Max. Press. (bar)	Max. Pressure (psi)	E	L
STOPFUDIN 145 OPEN	14.5	8L - 1/4"	450	6.525	2 mm	300
STOPFUDIN 17 OPEN	17	8S - 10L - 3/8"	445	6.453	2 mm	300
STOPFUDIN 185 OPEN	18.5	10S - 12L	420	6.090	2 mm	300
STOPFUDIN 205 OPEN	20.5	12S	420	6.090	2 mm	300
STOPFUDIN 225 OPEN	22.5	14S - 15L - 1/2"	420	6.090	2 mm	300
STOPFUDIN 245 OPEN	24.5	16S - 5/8"	420	6.090	2 mm	300
STOPFUDIN 265 OPEN	26.5	18L - 3/4"	420	6.090	2 mm	300
STOPFUDIN 305 OPEN	30.5	20S - 22L	420	6.090	2,5 mm	300
STOPFUDIN 34 OPEN	34	1"	420	6.090	2,5 mm	450
STOPFUDIN 365 OPEN	36.5	25S - 28L	420	6.090	2,5 mm	450
STOPFUDIN 425 OPEN	42.5	30S - 1" 1/4	420	6.090	2,5 mm	450
STOPFUDIN 455 OPEN	45.5	35L	420	6.090	2,5 mm	450
STOPFUDIN 49 OPEN	49	1" 1/2	420	6.090	2,5 mm	450
STOPFUDIN 525 OPEN	52.5	38S - 42L	385	5.583	2,5 mm	450
STOPFUDIN 60 OPEN	60	2"	350	5.075	2,5 mm	450