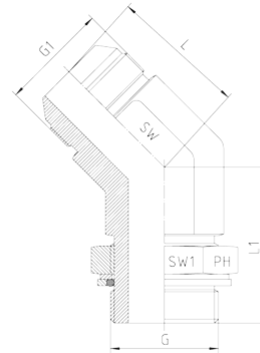


**Rubrik 6.35
Male Stud Elbows - 45°**


Adjustable Stud Elbows - 45°
Thread: BSP - Parallel
Sealing by Captive O-ring and Washer

Pressure	Tube O.D.		Thread		Approx. Dimensions				Order-Code	
	PN	mm	in.	G1 = UNF/UN	G = BSP	L	L1	SW1		SW
250	6	1/4"		7/16"-20	1/8"	18	27	14	11	1252534-04-02
200	6	1/4"		7/16"-20	1/4"	21	29	19	14	1252534-04-04
200	8	5/16"		1/2"-20	1/8"	20	27	14	14	1252534-05-02
200	8	5/16"		1/2"-20	1/4"	21	27	19	14	1252534-05-04
200	10	3/8"		9/16"-18	1/4"	21	29	19	14	1252534-06-04
200	10	3/8"		9/16"-18	3/8"	22	33	22	19	1252534-06-06
200	10	3/8"		9/16"-18	1/2"	22	39	27	22	1252534-06-08
200	12	1/2"		3/4"-16	3/8"	25	33	22	19	1252534-08-06
200	12	1/2"		3/4"-16	1/2"	25	39	27	22	1252534-08-08
200	14, 15, 16	5/8"		7/8"-14	1/2"	28	39	27	22	1252534-10-08
200	18, 20	3/4"		1 1/16"-12	3/4"	33	44	36	27	1252534-12-12