




YB-P16HPZ

Global Flex Crimping Machine

P16HPZ is a hand pumped operated hydraulic crimping machine, which is most suitable for repair workshops and field use. They are easy to use, light and compact in size, allowing them to be carried and/or stored to any location

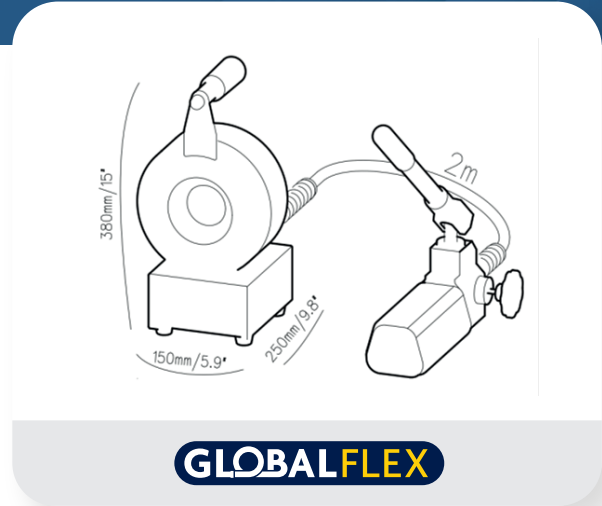

TECHNICAL DATA

Max crimping dia (mm)	10 - 45
Max crimping dia (inches)	0.39 - 1.77
Max crimping force (kN)	955
Max crimping force (tonnage)	95
Cycle time 10mm (s)	
Hose size ID (inches)	1
Die set series	P16
Max opening (mm)	+20
Max opening without dies (mm)	59
Master die D/L (inches)	1.54
Motor power (kW/HP)	-
Oil tank volume (L)	-

P16 DIES

DieSetNo	Crimping Range	ID (mm)	L (mm)
P16/06*	6.0 - 8.0	6	55
P16/08*	8.0 - 10.0	8	55
P16/10*	10.0 - 12.0	10	55
P16/12*	12.0 - 14.0	12	55
P16/14	14.0 - 16.0	14	55
P16/16	16.0 - 19.0	16	55
P16/19	19.0 - 23.0	19	55
P16/23	23.0 - 27.0	23	55
P16/27	27.0 - 31.0	27	65
P16/31	31.0 - 38.0	31	65

*Non standard dies



Hydraulic Hose & Fittings

Looking for hydraulic hose and fittings to go with your new swaging machine? We stock large quantities of hydraulic hose and fittings for use across every industry including; 1 wire, 2 wire, 4 wire and 6 wire hose, and fittings available in mild or stainless steel.

Looking to start a mobile hose replacement business?

We have a recommended starting stock list for any new van, speak to our sales team to discuss your specific needs.

30+ Years in the Hydraulic Industry

01472 255 928

www.hydraulicmegastore.com | hello@hydraulicmegastore.com

Unit 3 Estate Road 5, South Humberside Industrial Estate, Grimsby, North East Lincs, DN31 2TG

